

LED Wall Pack Light

RSWP-Series



Create value for you

RSWP-Series

Overview

Up to 120Lm/W system efficacy

28-150W, up to 70-400W replacement

Built-in smart system & photocell sensor available

1-10V/PWM/Resistance dimming options

110-277Vac, 3000-6500k, Ra:70/80

Up to 20KV surge protection(optional)


Optical grade polycarbonate lens material or borosilicate glass

IP65&IK08 resistance




Lighting Dimensions

Dimensions of 28W, 45W, 70W, 90W

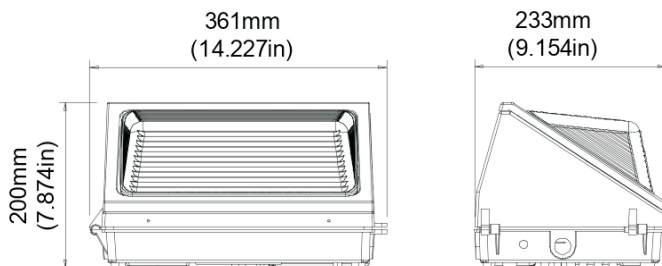

Dimensions of 150W

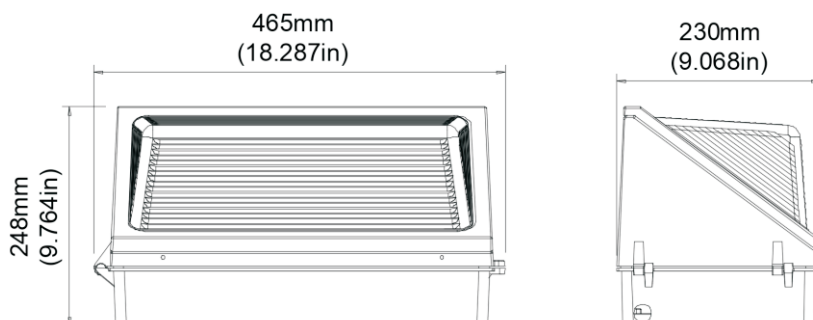

Instructions

Type-A



1. Fix the mounting plate to the wall

2. Mount the lamp

3. Connect the wire

4. Fix the lamp

Type-B



1. Open the fixture and mount the back plate to the wall

2. Connect the wire

3. Close the housing

4. Complete

Smart system



*Microwave
Sensor*




*PWM
DC 0-10V*



*Photocell
Control*

Illumination

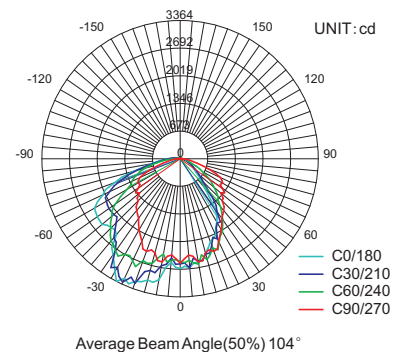

Parameter

Product Model	Power	Product Size(mm)	N.W.	Carton Size(mm)	G.W.	Input Voltage	System Efficacy	Beam Angle
RSWP-28W	28W	361*233*200mm	3.5Kg	380*280*245mm	4.0Kg	110-277V	120Lm/W	104°
RSWP-45W	45W	361*233*200mm	3.5Kg	380*280*245mm	4.0Kg	110-277V	120Lm/W	104°
RSWP-70W	70W	361*233*200mm	3.8Kg	380*280*245mm	4.2Kg	110-277V	120Lm/W	104°
RSWP-90W	90W	361*233*200mm	4.1Kg	380*280*245mm	4.6Kg	110-277V	120Lm/W	104°
RSWP-150W	150W	465*230*248mm	6.4Kg	490*270*280mm	7.0Kg	110-277V	120Lm/W	104°